



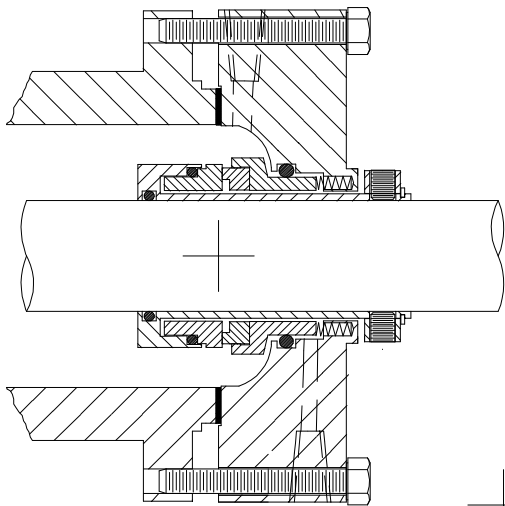

DELTA SINGLE CARTRIDGE SEAL FOR PUMPS WITH ENLARGED / TAPER BORE AND LARGE BOLT CIRCLE PATTERN

STYLE 3001

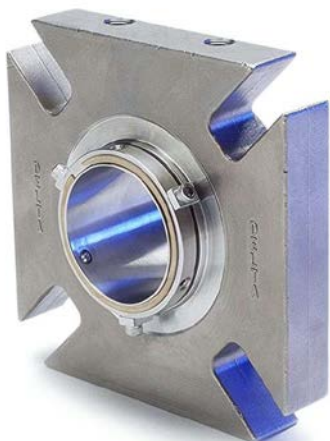

Special gland is designed to fit pumps with an enlarged bore or a taper bore, and can accommodate large bolt circle patterns. Two tangential flush connections are standard. An optional quench and drain feature is available.

Technical Features

Tangential flush connections positioned over the seal faces utilize the largest thru hole diameter available, supplying over 4 times the volume of straight drilled flush holes, providing maximum cooling and cleaning of seal faces maximizing seal life.

Interchangeable stationary faces enable application customization, resulting in stable, secure sealing, accommodating the widest range of operating conditions and applications in industry. Choose from:

- Monolithic, one-piece face designs that provide unparalleled face stability under fluctuating system operating conditions, resulting in superior emission control capabilities.
- Two piece face designs that assure optimum seal performance for the most challenging, demanding environments where one piece face construction is vulnerable to premature failure.

Rugged, heavy-duty gland castings eliminate distortion related failures typically encountered on "low cost, light duty gland designs".

Rotary inboard faces stabilized under compression are flexibly mounted utilizing o-rings for their shock and vibration absorption qualities. This eliminates premature fractures in the faces under thermal and mechanical shock that can cause catastrophic failures in other designs with faces under tension.

Balanced stationary cartridge design utilizes all static o-rings, which eliminates damage to the pump shaft/sleeve or seal normally caused by rotary pusher component or pusher cartridge type seals, allowing use of solid pump shafts that minimize deflection.

Positive hold, metal-centering clips center the seal in both the axial and radial directions.

Optional features:

- 2 piece stationary face
- Quench and drain feature

Choose from spare parts kits for field repair or the optional factory repair program. State of the art, easy-to-install design uses the least number of components, simplifying field repair, resulting in low life cycle costs.

All seals are pressure tested at the factory assuring 100% sealability during startup.

Application Data

Shaft speed: To 3600 RPM

Pressure: Vacuum to 400 PSI

Temperature: See O-ring limitations

Materials

Metal Parts: 316SS, Alloy 20, Hastelloy "C", Titanium


Springs: Hastelloy "C"

Faces: Combinations of Carbon, Sintered-Silicon Carbide, and Tungsten Carbide


Elastomers: Viton, EPR, Kalrez, Aflas, Teflon

DIMENSIONAL DATA FOR DELTA SEAL STYLE 3001

FRONT VIEW

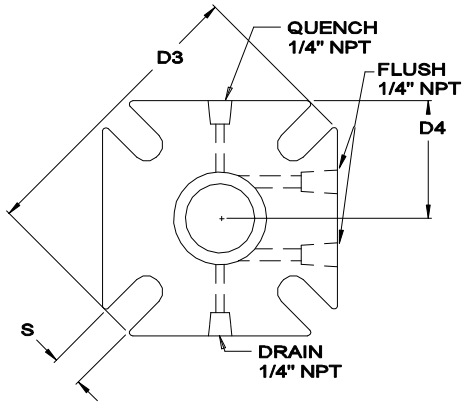


SIDE VIEW

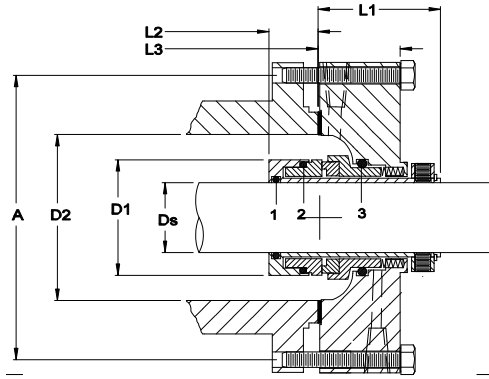

OPTIONAL GLAND FEATURE

Quench and Drain optional on this seal model.



(REPRESENTATIVE VIEW)

DS Seal Size	D1 Sleeve OD	D2 Min	D2 Max	D3 Gland OD	D4 Gland Flat	A				S Slot Width	L1 Outside Length	L2 Inside Length	L3 Gland Length	Pos. 1 Oring	Pos. 2 Oring	Pos. 3 Oring	Pos. 4 Oring	Pos. 5 Oring	Pos. 6 Oring
						Min. Bolt Circle by Stud Size													
						3/8"	1/2"	5/8"	3/4"										
1.125	1.715	2.250	3.000	4.405	1.815	3.687	3.812	3.937	4.062	0.510	1.875	0.780	1.250	122	028	223			
1.375	1.965	2.500	3.275	5.285	2.140	4.000	4.125	4.250	4.375	0.470	1.875	0.780	1.250	126	030	225			
1.750	2.460	3.250	4.125	6.585	2.620	4.775	4.900	5.025	5.150	0.680	1.875	0.780	1.250	132	139	228			
1.875	2.585	3.250	4.125	6.585	2.620	4.775	4.900	5.025	5.150	0.680	1.875	0.780	1.250	134	141	229			
2.125	2.835	3.500	4.385	7.105	2.750	5.060	5.185	5.310	5.435	0.680	1.875	0.780	1.250	138	145	231			
2.250	2.960	4.000	4.875	8.180	3.235	5.312	5.687	5.812	5.937	0.810	1.875	0.780	1.250	140	147	232			
2.375	3.090	4.000	4.875	8.175	3.235	5.562	5.687	5.812	5.937	0.680	1.875	0.780	1.250	142	149	233			
2.500	3.215	4.250	5.135	7.835	3.075	5.875	6.000	6.125	6.250	0.680	1.875	0.780	1.250	144	151	234			
2.625	3.340	4.250	5.010	7.835	3.075	5.870	5.995	6.120	6.245	0.680	1.875	0.780	1.250	146	151	235			
2.750	3.660	4.500	5.625	9.083	3.495	6.434	6.562	6.687	6.812	0.690	1.875	0.780	1.250	232	236	236			
3.000	3.915	4.500	5.625	9.083	3.495	6.434	6.562	6.687	6.812	0.690	1.875	0.780	1.250	234	238	238			
3.750	4.660	5.625	7.125	10.105	3.920	7.937	8.062	8.187	8.312	0.810	1.875	0.780	1.250	240	244	244			
4.500	5.415	6.875	7.875	11.805	4.520	9.687	9.812	9.937	10.062	0.810	1.875	0.780	1.250	246	250	250			
4.750	5.665	6.875	7.875	11.805	4.520	9.687	9.812	9.937	10.062	0.810	1.875	0.780	1.250	248	252	252			

Distributed By:

(Phone)
(Fax)



Manufactured By:

Delta
44 Probbler Lane
Fall River, MA 02720
508-324-4032 (Phone)
508-324-4339 (Fax)

